


CS-CZ25ZKE + CU-CZ25ZKE



AC-snabbv ljare 

Med bara n gra f r klick kan du hitta en luftkonditioneringsl sning f r upp till fem rum!

[PROVA SNABBV LJAREN F R LUFTKONDITIONERING I HUSH LL](#)




Ny r ststyrning

Kontroll utan gr nser och f r handsfree-hj lp f r att fullt ut f r tillg ng till funktionerna i dina v rmepumpar.

[L S MER](#)

Panasonic Comfort Cloud App. Smart centraliserad styrning

[L S MER](#)

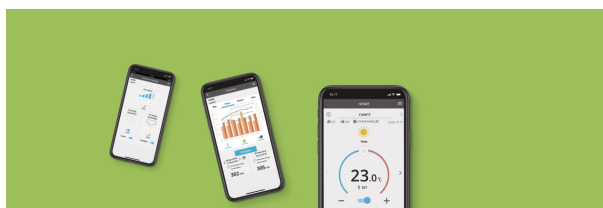



**Framtiden Är nu
Grön, energisnål och ren**
Värmepumpar för ditt hem

[JÄMFÄR LÖSNINGAR](#)»

Upptäck den senaste generationen värmepumpsystem

Panasonic CZ25ZKE CZ superkompakt växelriktare+ - R32		
		3.40 kW
Maximum capacity	kW	5,30 kW
Reference		CS-CZ25ZKE + CU-CZ25ZKE
Heating capacity (Nominal)	kW	3,40
Heating capacity (Min)	kW	0,85
Heating capacity (Max)	kW	5,30
COP (1)	W/W	4,66
Heating capacity at -7°C (2)	kW	3,40
COP at -7°C (1)	W/W	2,56
Heating capacity at -15°C (2)	kW	2,80
COP at -15°C (1)	W/W	2,33
Heating capacity at -20°C (2)	kW	2,20
COP at -20°C (1)	W/W	2,00
Heating capacity at -25°C (2)	kW	1,60
COP at -25°C (1)	W/W	1,63
SCOP (3)		4,30 A+
Pdesign at -10°C	kW	2,80
Input power heating (Nominal)	kW	0,73
Input power heating (Min)	kW	0,18
Input power heating (Max)	kW	1,48
Annual energy consumption heating (4)	kWh/a	912
Cooling capacity (Nominal)	kW	2,50
Cooling capacity (Min)	kW	0,85
Cooling capacity (Max)	kW	3,00
SEER (3)		6,70 A++
Pdesign (cooling)	kW	2,50
Input power cooling (Nominal)	kW	0,54
Input power cooling (Min)	kW	0,19
Input power cooling (Max)	kW	0,73
Annual energy consumption cooling (4)	kWh/a	131
Indoor unit		CS-CZ25ZKE
Indoor power source	V	230
Indoor air flow (Heat)	m ³ /min	12,5
Indoor air flow (Cool)	m ³ /min	10,8
Moisture removal volume	L/h	1,5
Indoor sound pressure (Heat -Hi) (5)	dB(A)	40
Indoor sound pressure (Heat -Lo) (5)	dB(A)	27
Indoor sound pressure (Heat -Q-Lo) (5)	dB(A)	20
Indoor sound pressure (Cool -Hi) (5)	dB(A)	39
Indoor sound pressure (Cool -Lo) (5)	dB(A)	25
Indoor sound pressure (Cool -Q-Lo) (5)	dB(A)	21
Indoor dimension (Height)	mm	290
Indoor dimension (Width)	mm	779
Indoor dimension (Depth)	mm	209
Indoor net weight	kg	8
Outdoor unit		CU-CZ25ZKE
Outdoor air flow (Heat)	m ³ /min	28,9
Outdoor air flow (Cool)	m ³ /min	29,7
Outdoor sound pressure (Heat -Hi) (5)	dB(A)	47
Outdoor sound pressure (Heat -Lo) (5)	dB(A)	44

Panasonic CZ25ZKE CZ superkompakt växelriktare+ - R32		3.40 kW
Outdoor sound pressure (Cool - Hi) (5)	dB(A)	46
Outdoor sound pressure (Cool - Lo) (5)	dB(A)	43
Outdoor dimension (Height) (6)	mm	622
Outdoor dimension (Width) (6)	mm	824
Outdoor dimension (Depth) (6)	mm	299
Outdoor net weight	kg	33
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 20
Elevation difference (in/out) (7)	m	10
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	10
Refrigerant (R32) / CO2 Eq.	kg / T	0,67 / 0,45
Operating range (Heat - Min)	°C	-25
Operating range (Heat - Max)	°C	+24
Operating range (Cool - Min)	°C	+16
Operating range (Cool - Max)	°C	+43

Kompletterande produkter

